



ALLOWABLE RIPPED SLAB WIDTHS

Narrow-width slabs are available at additional cost by rip-cutting standard width slabs. Refer to the guidelines below for allowable ranges of ripped slab widths. Note that not all partial width slabs are available due to safety concerns during handling and erection.

12" & 12½" ULTRASPAN



WIDTH < 2'-2" UNACCEPTABLE

2'-2" ≤ WIDTH ≤ 2'-7" ACCEPTABLE

2'-7" < WIDTH < 3'-1½" UNACCEPTABLE

3'-1½" ≤ WIDTH ≤ 3'-6½" ACCEPTABLE

3'-6½" < WIDTH < 4'-0" UNACCEPTABLE

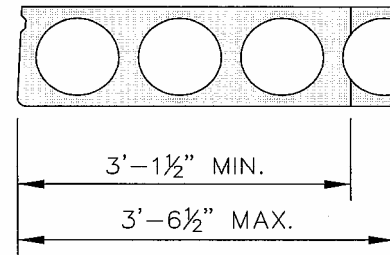

8" ULTRASPAN

WIDTH < 1'-6" UNACCEPTABLE

1'-6" ≤ WIDTH ≤ 1'-9" ACCEPTABLE

1'-9" < WIDTH < 2'-1½" UNACCEPTABLE

2'-1½" ≤ WIDTH ≤ 2'-4½" ACCEPTABLE

2'-4½" < WIDTH < 2'-8½" UNACCEPTABLE

2'-8½" ≤ WIDTH ≤ 2'-11½" ACCEPTABLE

2'-11½" < WIDTH < 3'-4" UNACCEPTABLE

3'-4" ≤ WIDTH ≤ 3'-7" ACCEPTABLE

3'-7" < WIDTH < 4'-0" UNACCEPTABLE

